

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
**Image Problem Mailbox.**

FIG. 1

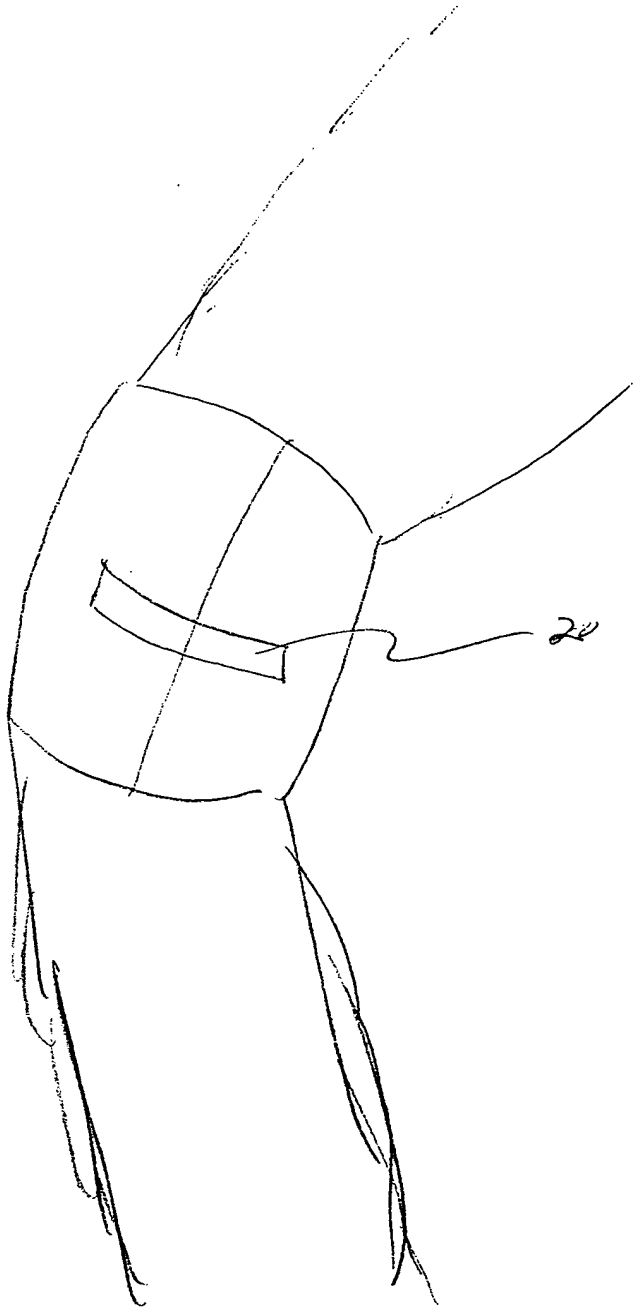


FIG. 1

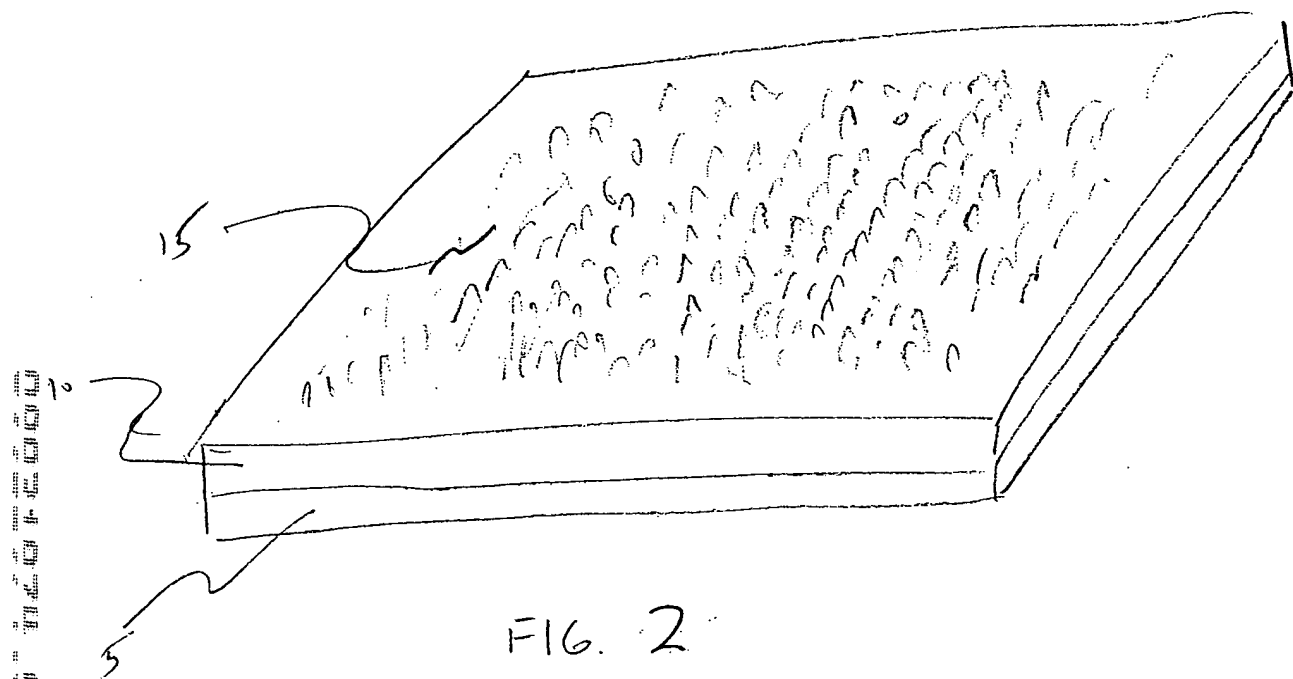


FIG. 2

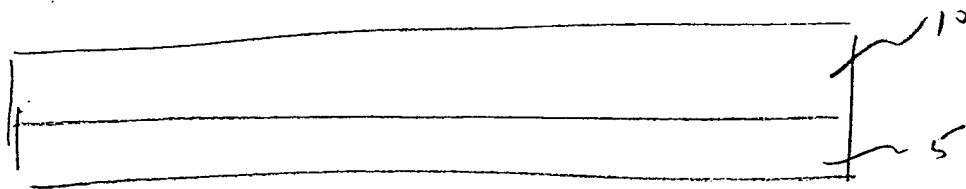


FIG. 3

\_\_\_\_\_

FIG. 4

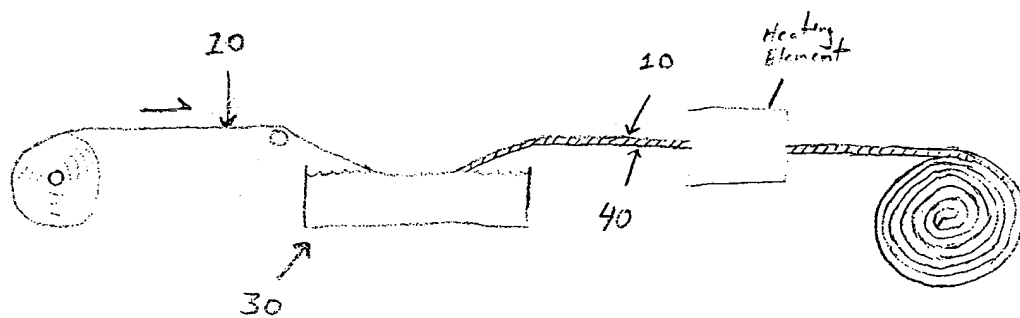
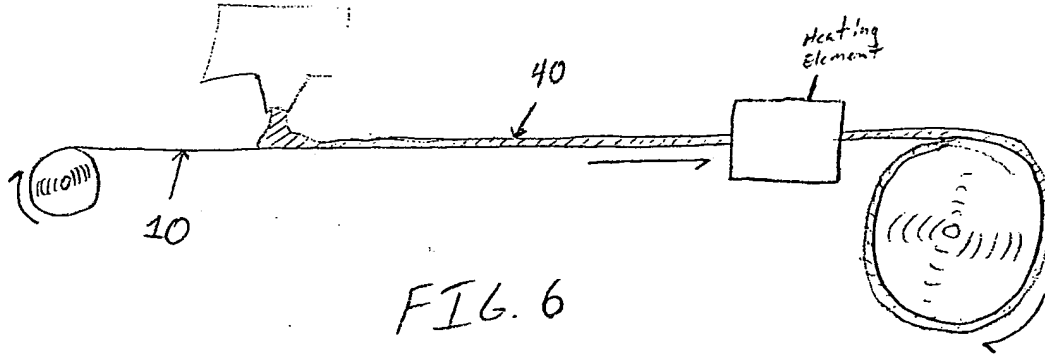


FIG. 7 is a perspective view of the device in accordance with the present invention, showing the device in a closed position. The device includes a main body 10, a handle 20, and a trigger 30. The handle 20 is connected to the main body 10 and the trigger 30. The trigger 30 is positioned at the end of the handle 20. The device is shown in a closed position, with the handle 20 and trigger 30 folded against the main body 10.

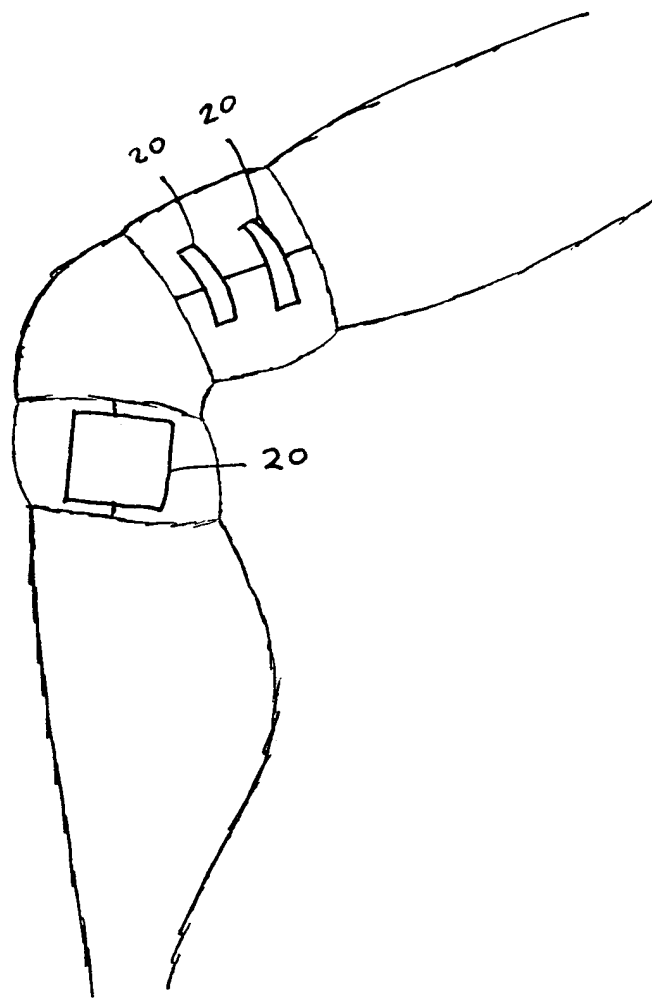


FIG. 7

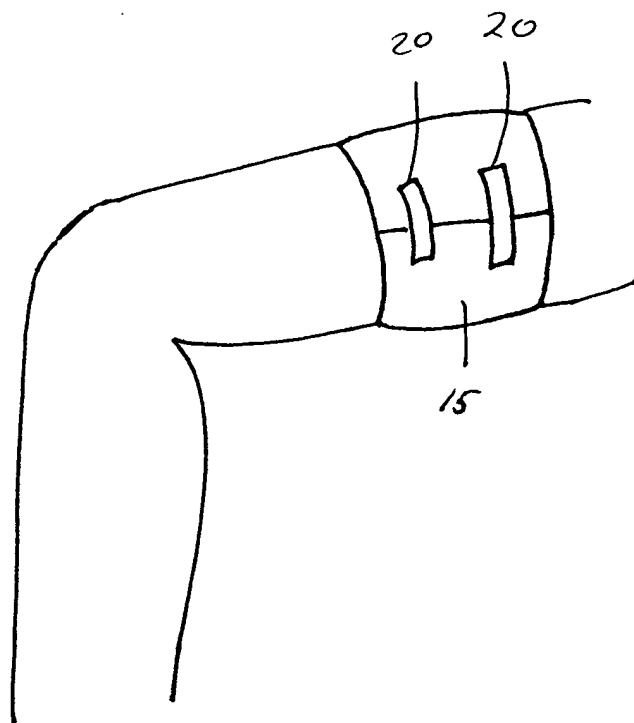


FIG. 8